

STANDARD PRODUCT CHARACTERISTICS	
Media	Lofted fiberglass media
Frame	30 gauge galvanized steel
Max. Temperature	180°F
Flammability	Classified per UL Standard 900
Height Tolerance	±1/8"
Width Tolerance	±1/8"
Depth Tolerance	±1/4"
Final Resistance	Recommended 1.0"w.g.

AVAILABLE PRODUCT OPTIONS	
ASHRAE EFF.	MERV 8, 11, 13, 15
WIDTH	Standard 24" and available in 12" wide options
HEADER	13/16" single header construction; Cambridge header option available
GASKETING	Upstream, downstream, and side gasketing available
SUPPORT LOOPS	Pocket support loops available as an additional option

PRODUCT DIMENSIONAL DATA							
Nominal Size (H"xW"xD")	Actual Size (H"xW"xD")			# of Pockets		Media Area (sq.ft.)	
24 x 24 x 10	23-3/8 x 23-3/8 x 10			6		21	
24 x 24 x 15	23-3/8 x 23-3/8 x 15			6	12	32	63
24 x 24 x 22	23-3/8 x 23-3/8 x 22			6	8	10	48 63 77
24 x 24 x 29	23-3/8 x 23-3/8 x 29			6	8	10	65 84 105
24 x 24 x 36	23-3/8 x 23-3/8 x 36			6	8	10	82 102 128

ASHRAE 52.2 PERFORMANCE DATA (24x24 @500 fpm)												
Filter Depth	Initial Resistance ("w.g.)											
	MERV 11				MERV 13				MERV 15			
	6 Pkt	8 Pkt	10 Pkt	12 Pkt	6 Pkt	8 Pkt	10 Pkt	12 Pkt	6 Pkt	8 Pkt	10 Pkt	12 Pkt
15"	-	-	-	0.33	-	-	-	0.45	-	-	-	0.58
22"	0.45	0.34	0.27	-	0.63	0.47	0.37	-	0.80	0.60	0.48	-
30"	0.35	0.26	0.21	-	0.47	0.35	0.28	-	0.60	0.45	0.36	-
36"	0.29	0.22	-	-	0.40	0.30	-	-	0.51	0.38	-	-

SPECIFICATION INFORMATION

Customer Information: _____

Item Number: _____


For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

SPECIFIED OPTIONS

Customer Initial and Date for Product Specification _____

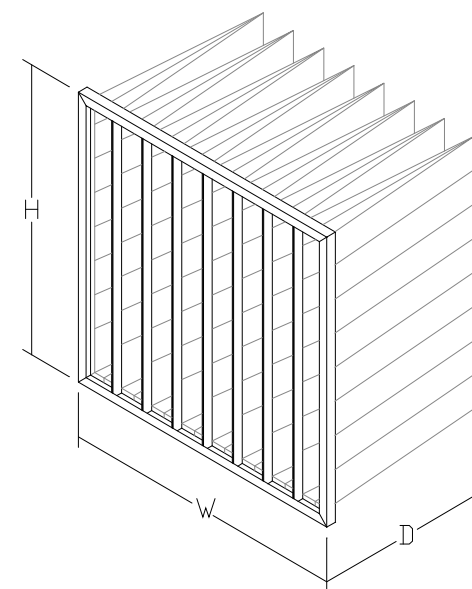

AEROSTAR FIBERGLASS Pocket Filters

Rev	BC	Date:	11/1/2017	Drawing Number:	SD-FG PKT	Revision:	06
-----	----	-------	-----------	-----------------	-----------	-----------	----

FiltrationGroupIAQ.com