

### STANDARD PRODUCT CHARACTERISTICS

Media	Heavy and durable spunbond synthetic media
Frame	30 gauge galvanized steel
Max. Temperature	150°F
Flammability	Classified per UL Standard 900
Height Tolerance	±1/8"
Width Tolerance	±1/8"
Depth Tolerance	±1/4"
Final Resistance	Recommended 1.0"w.g.

### AVAILABLE PRODUCT OPTIONS

ASHRAE EFF.	MERV 11, 14, 15
WIDTH	Standard 24" and available in 12" wide options
HEADER	13/16" single header construction; Cambridge header option available
GASKETING	Upstream, downstream, and side gasketing available
SUPPORT LOOPS	Pocket support loops available as an additional option

### PRODUCT DIMENSIONAL DATA

Nominal Size (H"xW"xD")	Actual Size (H"xW"xD")	# of Pockets			Media Area (sq.ft.)		
		6	8	10	40	53	66
24 x 24 x 12	23-3/8 x 23-3/8 x 12	10	12	42	50		
24 x 24 x 19	23-3/8 x 23-3/8 x 19	6	8	10	40	53	66
24 x 24 x 26	23-3/8 x 23-3/8 x 26	6	8	10	43	72	90

### ASHRAE 52.2 PERFORMANCE DATA (24x24 @500 fpm)

Filter Depth	Initial Resistance ("w.g.)			
	MERV 11		MERV 15	
	8 Pkt	10 Pkt	8 Pkt	10 Pkt
19"	0.25	0.20	0.21	0.17
26"	0.42	0.35	0.37	0.30

### SPECIFICATION INFORMATION

Customer Information: \_\_\_\_\_

Item Number: \_\_\_\_\_


For Non-Standard Sizes, Please Consult the Factory.

\_\_\_\_\_ (H) X \_\_\_\_\_ (W) X \_\_\_\_\_ (D)

Please Specify Size as Nominal or Exact \_\_\_\_\_

### SPECIFIED OPTIONS

Customer Initial and Date for Product Specification \_\_\_\_\_

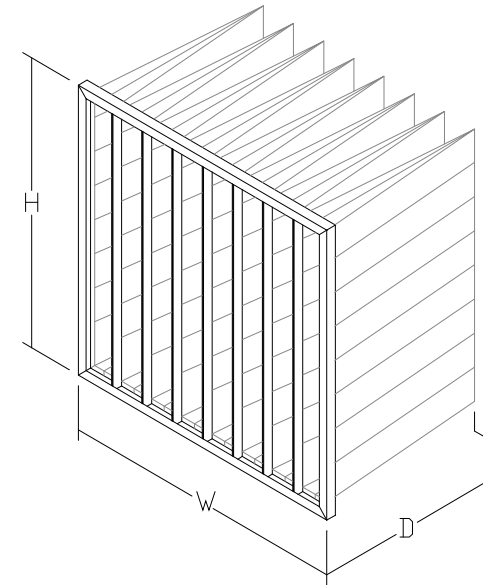

### AEROSTAR RHINO Pocket Filters

Rev	BC	Date:	11/1/2017	Drawing Number:	SD-RHINO PKT	Revision:	03
<a href="http://FiltrationGroupIAQ.com">FiltrationGroupIAQ.com</a>							