


FlowStar Filter Specifications

- 1) Media Separators: Hot Melt
- 2) Frame Material: Extruded, clear anodized aluminum frame
- 3) Sealant: 2-part polyurethane
- 4) Filter tolerances are +0.00/-0.13 from listed dimensions
- 5) Filters will be square to within 1/8" for diagonals under 30 in. and Filters will be square to within 1/4" for diagonals over 30 in.
- 6) UL Rating: UL 900 Classified
- 7) Upstream, Downstream, Both, or No gasketing options available
Gasket to be ball-in-socket joint and sealed with flexible sealant
- 8) Screens available on Upstream, Downstream, or Both sides of filter
Material: Anodized aluminum, aluminum perforated, expanded painted white, Stainless steel perforated, stainless steel, or powder coated steel
- 9) Efficiencies available: IEST A-99.97% @0.3 micron, IEST C-99.99% @0.3 micron, IEST D-99.999% @0.3 micron, or IEST F-99.999% @0.1 micron
- 10) Available with No Divider, Divider with 0-Test Ports, 1-, 2-, or 3-Test Port Divider
- 11) Filters manufactured in accordance with IEST-RP-CC001.5

Filter & Air Resistance Information (Resistance based on open media face, 100 fpm air velocity)				
Filter Depth (Inches)	Exterior	Pack Depth (Inches)	Resistance Type C (Inches W.G.)	Resistance Type F (Inches W.G.)
2.72	CP-26 Smooth	2.0	0.52	0.64
3.06	CP-04 Smooth	2.0	0.52	0.64
3.54	CP-27 Smooth	2.5	0.45	0.53
4.60	CP-28 Smooth	4.0	0.36	0.40
5.25	CP-19 Smooth	4.0	0.36	0.40
8.06	CP-33 Smooth	7.5	0.22	0.28
11.50	HEAF Smooth	10.5	0.15	0.20

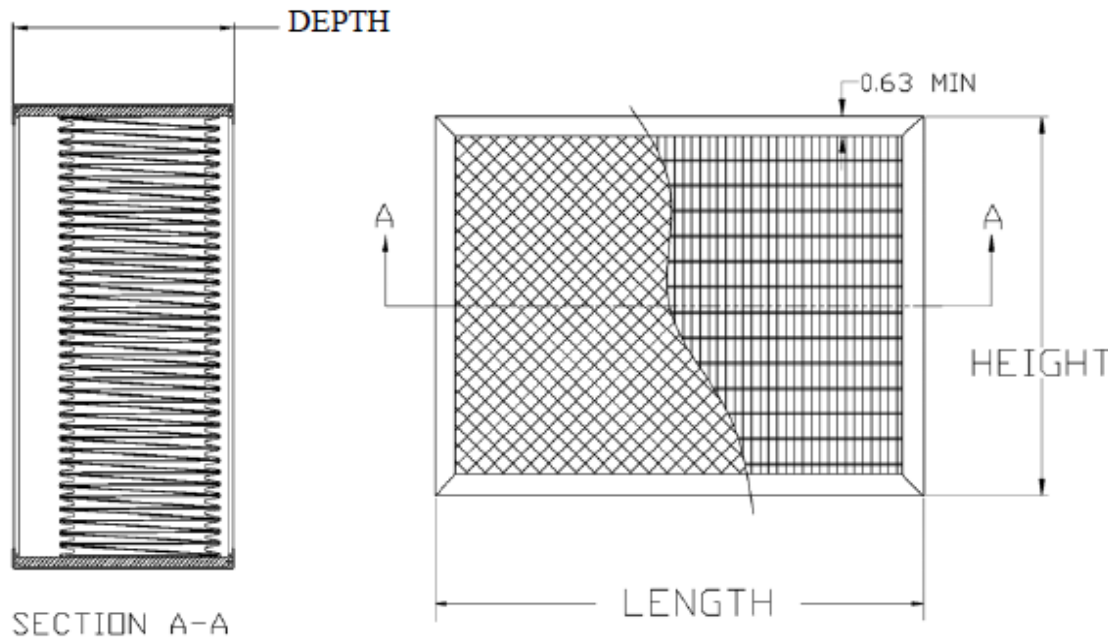

SPECIFICATION INFORMATION

Customer Information: _____

Item Number: _____

For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

SPECIFIED OPTIONS

Customer Initial and Date for Product Specification _____



Filtration Group®
HVAC



FLOWSTAR®

FLOWSTAR CR Panel w/Gasket

Rev	BC	Date:	2018-04-10	Drawing Number:		Revision:	
www.filtrationgroup.com				SD-CR GASKET	06		